


SINGLE HEAD AUTO BUF FILLER - PFM-3-BUF

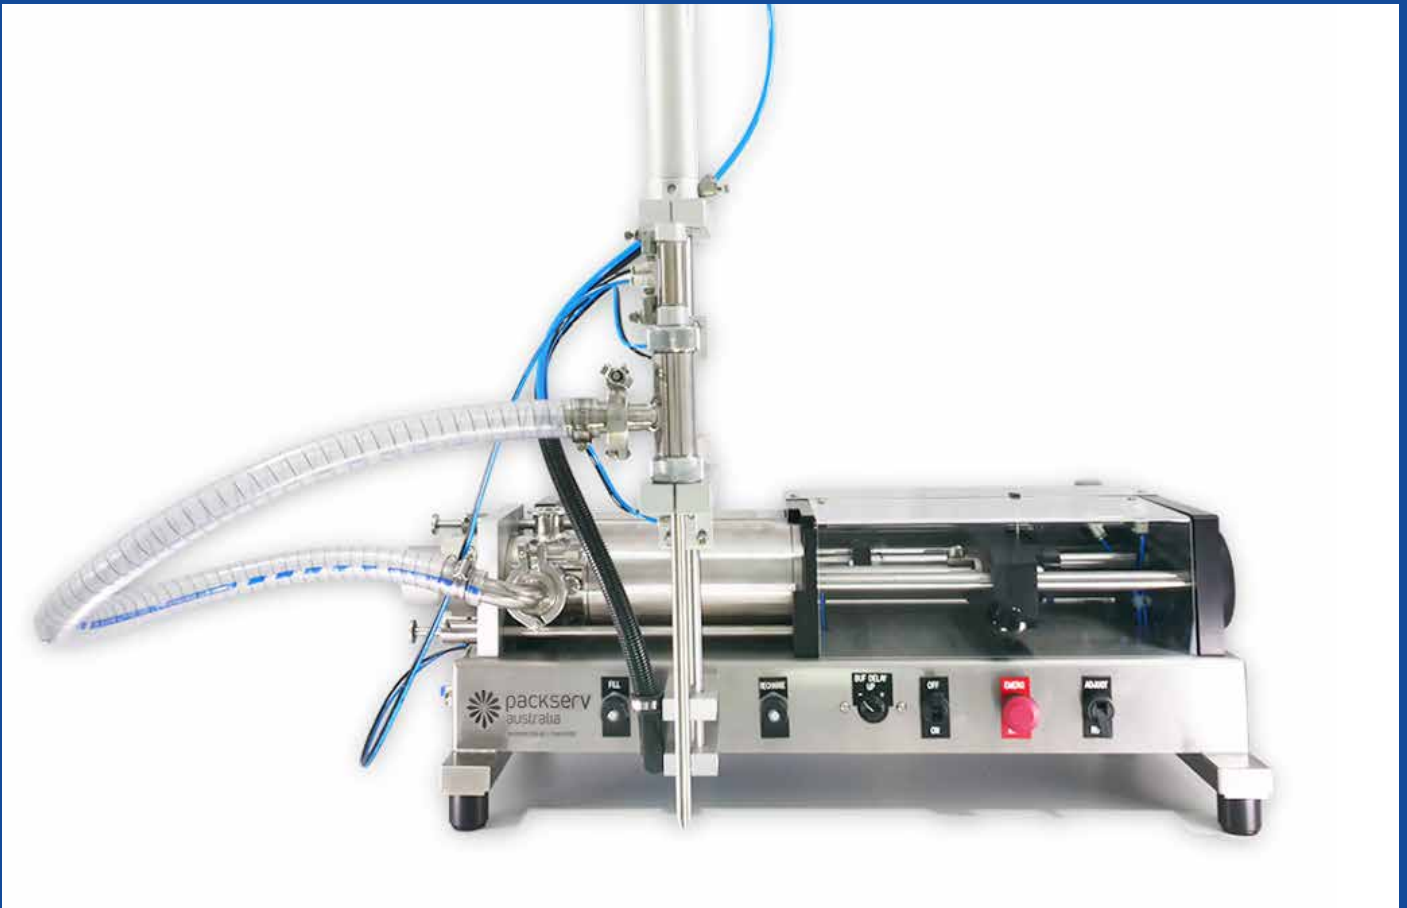

SINGLE HEAD AUTO BUF FILLER - PFM-3-BUF

The Packserv PFM-3-BUF system is a fully automatic liquid, paste and cream (bottom up) filling machine that is both user friendly and versatile. The heavy duty, all pneumatic design of the PFM-3-BUF is also compact, reliable and easy to clean. Conveniently, the Single Head BUF filler comes standard with a positive shut-off nozzle and bottom-up fill.

The valve system of the PFM-BUF-3 handles all types of bottling products from thin liquids to creams and thick pastes. It will even package products with soft suspended solids. Previously, this required two different types of filling machines or an expensive change of parts.

The cylinder design of the PFM-3-BUF enables quicker dismantling and easier, more thorough cleaning of wet parts.

ADDITIONAL INFORMATION

- Heavy duty pneumatic product cylinder drive system
- All pneumatic flameproof operation suitable for use with flammable products
- Easy volume adjustment while operating
- Simple tool-free dismantling makes for easier cleaning
- Quick changeover of products and parts
- Suitable for liquids, creams and pastes even with suspended solids
- This filler is suitable for food and pharmaceutical use
- Suitable for a warm water hose down
- Quick connect tri-clover product inlet/outlet fittings
- Individual fill speed and recharge speed controls

SINGLE HEAD AUTO BUF FILLER - PFM-3-BUF

SPECIFICATIONS

Weight	35 kilograms (77lbs)
Length	820mm (32in)
Width	330mm (13in)
Height	800mm (31in)
Construction Type	316 grade stainless steel wet parts
Container Type	All container/product types assuming nozzle fits into opening orifice
Mounting	Benchtop (Trolley available)
Industries	All food, pharmaceutical and industrial applications
Air Pressure	600kpa (80psi) pressure requirement
Noise	Medium
Flameproof	Yes
Speed	Adjustable for all functions

Fill Range	2.5ml to 1250mls fill range, single shot
Fill Temperature	Cold and hot fill (temperatures above 65°C, 149°F requires an alternative valve system)
Fill Type	Liquids, creams, pastes
Not Suitable Products	Powder and granules
Benchtop	Yes, or trolley mounted
Machine Cleaning	Easy to disassemble for full wash up
Volume	Fully adjustable
Filling Accuracy	+/- 0.5 to 1% variance
Cylinder Sizes	25ml, 50ml, 125ml, 250ml, 500ml, 750ml or 1250ml
Automatic Function	Designed to be operator free